T-95 / CB-95

Large KEYMAT lock head with tubular or dimple key

REFERENCE	VARIANT	FAMILY	REVISION
T-95	CB-95	TOY Keymat · Metal doors	1 · Nov. 2026

MADE IN-HOUSE



DESCRIPTION

Floor security lock for roller shutters and metal roller doors. The lock head is fixed to the bottom slat of the shutter and, when closing, its hook bolt enters the base recessed in the floor, locking the shutter with the key.

Large lock head with an excellent presence, with a chrome-plated brass hook bolt guard. Available as a replacement lock head or as a complete device with floor base.

Strong presence
84 × 45 mm lock head in chrome-plated brass.

Stainless hook bolt
Stainless steel hook bolt with guard.

Two key types
Tubular (T-95) or flat dimple (CB-95). 3 keys.

Keyed alike
Several lock heads keyed alike at no extra cost.


Hook bolt detail



T-95 lock head



Recessed floor base


Tubular keys (×3)


Dimple keys (×3)


REFERENCES AND VERSIONS

REFERENCE	DESCRIPTION	KEY	INCLUDES	PRICE CODE
T-95	Replacement lock head (without floor part)	Tubular	Lock head + 3 keys + 2 M10 screws + washers	Series **YT095CS** Keyed alike **YT095CI**
T-95 + base	Complete device for new installation	Tubular	The above + floor base	Series **YT095DS** Keyed alike **YT095DI**
CB-95	Replacement lock head (without floor part)	Dimple	Lock head + 3 keys + 2 M10 screws + washers	Series **YCB95CS** Keyed alike **YCB95CI**
CB-95 + base	Complete device for new installation	Dimple	The above + floor base	Series **YCB95DS** Keyed alike **YCB95DI**

Comercial CBM 95, S.L. · Talleres Blamar, S.A.
Can Bernat 4 · Pol. Ind. Torrent d'en Puig · 08358 Arenys de Munt (Barcelona, Spain)
T. +34 93 795 13 01 · info@blamar.com
cbmblamar.com

T-95 / CB-95 · Technical data

DRAWING AND DIMENSIONS

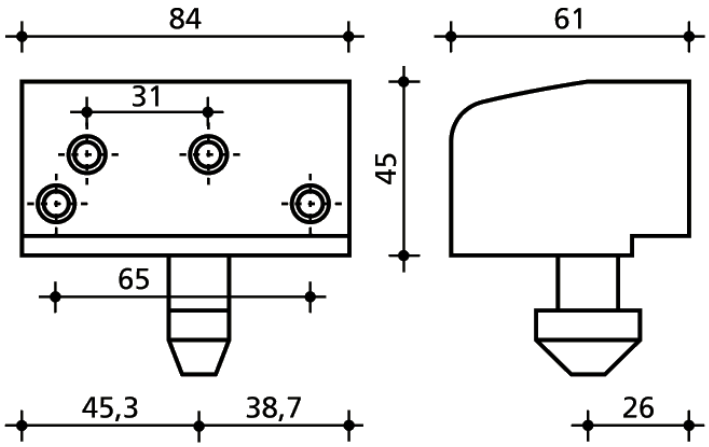

84 total width	**31** between holes	**65** between lower holes	**45** head height	**61** depth	**45,3 / 38,7** position hook bolt	**26** hook bolt axis · face

Dimensions in mm, according to the KEYMAT/TOY catalogue. For replacements, check the dimensions of the existing lock head before ordering.

SPECIFICATIONS

Application	**Roller shutters and metal roller doors**
Lock head body	**Chrome-plated brass**
Hook bolt guard	**Chrome-plated brass**
Hook bolt	**Stainless steel**
Finish	**Polished chrome**
Key type	**Tubular (T-95) · Dimple (CB-95)**
Keys supplied	**3 units**
Fixing	**2 M10 screws + washers**
Keyed alike	**Yes, on request at no extra cost**
Floor base	**KEYMAT K-3 floor part (compatible with K-3 Plus)**

INSTALLATION

1. Position the lock head on the bottom slat of the shutter, aligned with the floor base.
2. Fix the lock head with the 2 M10 screws and washers.
3. For a new installation, drill the floor with a 53 mm bit and recess the base flush with the floor, directly below the hook bolt.
4. Lower the shutter and check that the hook bolt enters the base and locks with the key.

PACKAGE CONTENTS

- 1 original KEYMAT lock head
- 3 keys
- 2 M10 screws + washers
- Floor base (complete device only)

ISO 9001 2015

Comercial CBM 95, S.L. certifies that this product is manufactured in its facilities in Arenys de Munt (Barcelona) following the quality standards of its quality manual, in accordance with ISO 9001:2015, certified by TÜV Rheinland (no. 0.04.09198). If you order more than one unit, state whether you want them keyed alike or with different keys.

MADE IN EUROPE BY Blamar