TCBM-140

Straight solid Ø14 pull handle in AISI-316 stainless steel

REFERENCES	SERIES	FAMILY	REVISION
1003 · 1004 · 1005	T Ø14 pull handles	CBM · Pull handles	1 · Nov. 2026

MADE IN-HOUSE



DESCRIPTION

Solid **Ø14 mm** pull handle for **glass doors** in **AISI-316 stainless steel**.

CBM pull handles are made exclusively of AISI-316 so that they keep their appearance over time, even when installed in aggressive environments such as the seafront.

AISI-316 steel
The highest-grade stainless steel, also for aggressive environments.

Solid Ø14
Solid 14 mm diameter bar.

Single or double
For one side or both, with fixing nuts.

Three distances
Centre distances of 200, 250 or 300 mm.



Overview



Detail

AVAILABLE FINISHES

Polished · Matt · Black · Polished gold · Matt gold

REFERENCES AND VERSIONS


REFERENCE	SIZE (MM)	PRICE LIST CODES
1003	L 400 · C.C. 200	Double: **1003DB** · **1003DM** · **1003DN** Single: **1003SB** · **1003SM**
1004	L 400 · C.C. 250	Double: **1004DB** · **1004DM** · **1004DN** Single: **1004SB** · **1004SM** · **1004SN**
1005	L 400 · C.C. 300	Double: **1005DB** · **1005DM** · **1005DN** Single: **1005SB** · **1005SM** · **1005SN**

Code suffix: D double · S single · B polished · M matt · N matt black RAL 9005 · A with adhesive. Finishes without a code: please ask.

Comercial CBM 95, S.L. · Talleres Blamar, S.A.
Can Bernat 4 · Pol. Ind. Torrent d'en Puig · 08358 Arenys de Munt (Barcelona, Spain)
T. +34 93 795 13 01 · info@blamar.com
cbmblamar.com

TCBM-140 · Technical data

DIMENSIONS

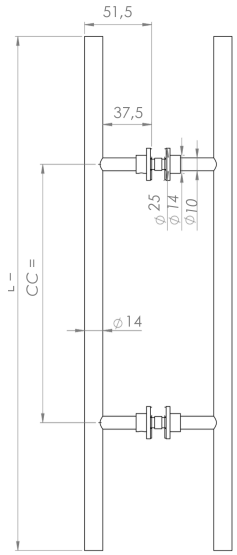

400 Total L	**200 / 250 / 300** C.C.	**Ø14** profile	**Ø25** base	**51,5** depth	**Ø12** glass hole

Dimensions in mm, according to the CBM doors and railings catalogue.

SPECIFICATIONS

Application	**Glass doors**
Material	**AISI-316 stainless steel**
Profile	**Solid Ø14**
Hole in the glass	**Ø12 mm**
Configuration	**Single (one side) or double (both sides)**
Finishes	**Polished, matt, matt black RAL 9005, polished gold and matt gold**
Thickness	**Any. If not specified, for 10 mm glass**

INSTALLATION

1. State the door thickness on your order. If not specified, it is supplied for 10 mm glass.
2. Drill the Ø12 mm holes in the glass at the chosen centre distance.
3. Fix the handle with the fixing nuts supplied.

PACKAGE CONTENTS

- TCBM-140 pull handle
- Fixing nuts

ISO 9001 2015

Comercial CBM 95, S.L. certifies that this product is manufactured in its facilities in Arenys de Munt (Barcelona) following the quality standards of its quality manual, in accordance with ISO 9001:2015, certified by TÜV Rheinland (no. 0.04.09198).

MADE IN EUROPE BY Blamar