# TCBM-30R2ML

Long Ø30 tube pull handle in AISI-316 stainless steel

| REFERENCES | SERIES | FAMILY | REVISION |
|---|---|---|---|
| 1522 | TCBM-30R2 / Tube | CBM · Pull handles | 1 · Nov. 2026 |

MADE IN-HOUSE



## DESCRIPTION

Long **Ø30 mm** tube pull handle for **glass doors** in **AISI-316 stainless steel**.

CBM pull handles are made exclusively of AISI-316 so that they keep their appearance over time, even when installed in aggressive environments such as the seafront.

**AISI-316 steel**
The highest-grade stainless steel, also for aggressive environments.

**Ø30 tube**
30 mm diameter tube.

**Single or double**
For one side or both, with fixing nuts.

**Long handle**
L 1000 mm, centre distance 800 mm.



Overview



Detail

## AVAILABLE FINISHES



Polished



Matt



Black



Polished gold



Matt gold

## REFERENCES AND VERSIONS


| REFERENCE | SIZE (MM) | PRICE LIST CODES |
|---|---|---|
| **1522** | L 1000 · C.C. 800 | Double: **1522DB** · **1522DM** · **1522DN**<br>Single: **1522SB** · **1522SM** · **1522SN** |

Code suffix: D double · S single · B polished · M matt · N matt black RAL 9005 · A with adhesive. Finishes without a code: please ask.

**Comercial CBM 95, S.L. · Talleres Blamar, S.A.**
Can Bernat 4 · Pol. Ind. Torrent d'en Puig · 08358 Arenys de Munt (Barcelona, Spain)
T. +34 93 795 13 01 · info@blamar.com
**cbmblamar.com** 

# TCBM-30R2ML · Technical data

## DIMENSIONS

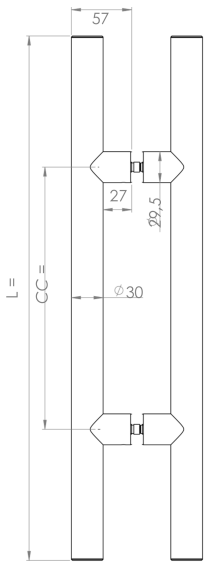


| | | | | | | |
|---|---|---|---|---|---|---|
| **1000** Total L | **800** C.C. | **Ø30** profile | **57** depth | **27** base | **Ø29,5** base | **Ø12** glass hole |

Dimensions in mm, according to the CBM doors and railings catalogue.

## SPECIFICATIONS

| | |
|---|---|
| Application | **Glass doors** |
| Material | **AISI-316 stainless steel** |
| Profile | **Ø30 tube** |
| Hole in the glass | **Ø12 mm** |
| Configuration | **Single (one side) or double (both sides)** |
| Finishes | **Polished, matt, matt black RAL 9005, polished gold and matt gold** |
| Thickness | **Any. If not specified, for 10 mm glass** |

## INSTALLATION

1. State the door thickness on your order. If not specified, it is supplied for 10 mm glass.
2. Drill the Ø12 mm holes in the glass at the chosen centre distance.
3. Fix the handle with the fixing nuts supplied.

## PACKAGE CONTENTS

- TCBM-30R2ML pull handle
- Fixing nuts

ISO 9001 2015

**Comercial CBM 95, S.L.** certifies that this product is manufactured in its facilities in Arenys de Munt (Barcelona) following the quality standards of its quality manual, in accordance with ISO 9001:2015, certified by TÜV Rheinland (no. 0.04.09198).

MADE IN EUROPE BY Blamar