TOY GA / GA.P

Self-locking TOY lock

REFERENCE	VARIANT	FAMILY	REVISION
GA	GA.P	TOY Keymat · Metal doors	1 · Nov. 2026

MADE IN-HOUSE



DESCRIPTION

Floor security lock for metal roller doors, self-locking: it locks by hand by turning the top knob ¼ turn; the key is only needed to open.

Chrome-plated aluminium lock head with stainless steel hook bolt. Available as a replacement lock head or as a complete device with floor part.

Self-locking
Locks by turning the knob ¼ turn, without a key.

Stainless hook bolt
Stainless steel hook bolt.

Two key types
TOY disc (GA) or KEY-P2 flat dimple (GA.P).

Keyed alike
Several lock heads keyed alike at no extra cost.


Hook bolt detail


Locking knob


KEY-P2 dimple keys


REFERENCES AND VERSIONS

REFERENCE	DESCRIPTION	KEY	INCLUDES	PRICE CODE
GA	Replacement lock head (without floor part)	TOY disc	Lock head + keys	Series **TGADCS** Keyed alike **TGADCI**
GA + base	Complete device for new installation	TOY disc	The above + floor part	Series **TGADDS** Keyed alike **TGADDI**
GA.P	Replacement lock head (without floor part)	Dimple	Lock head + keys	Series **TGA.PDCS** Keyed alike **TGA.PDCI**
GA.P + base	Complete device for new installation	Dimple	The above + floor part	Series **TGA.PDDS** Keyed alike **TGA.PDDI**

Comercial CBM 95, S.L. · Talleres Blamar, S.A.
Can Bernat 4 · Pol. Ind. Torrent d'en Puig · 08358 Arenys de Munt (Barcelona, Spain)
T. +34 93 795 13 01 · info@blamar.com
cbmblamar.com

TOY GA / GA.P · Technical data

DRAWING AND DIMENSIONS

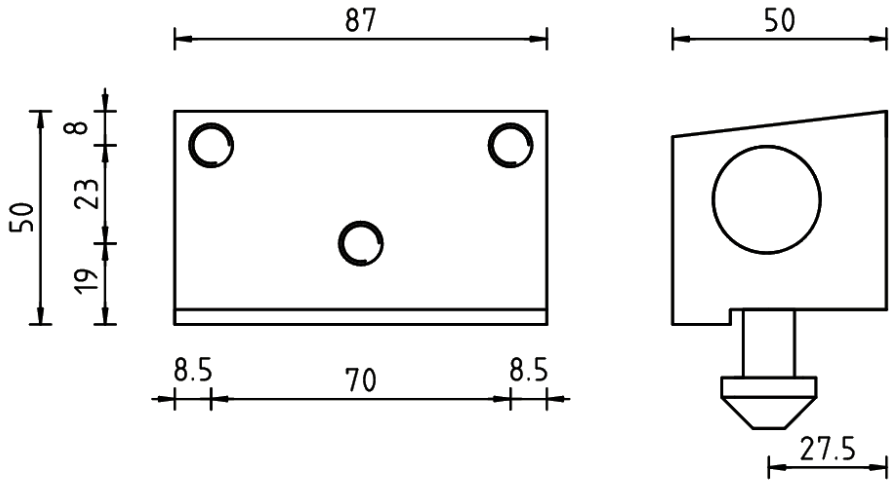

87 total width	**50** height	**8,5 / 70 / 8,5** holes (horiz.)	**8 / 23 / 19** holes (vert.)	**50** depth	**27,5** hook bolt axis · face

Dimensions in mm, according to the KEYMAT/TOY catalogue. For replacements, check the dimensions of the existing lock head before ordering.

SPECIFICATIONS

Application	**Metal roller doors**
Lock head	**Chrome-plated aluminium**
Hook bolt	**Stainless steel**
Locking	**Automatic (knob ¼ turn)**
Key type	**TOY disc (GA) · KEY-P2 flat dimple (GA.P)**
Keyed alike	**Yes, on request at no extra cost**
Master keying	**Available with TOY disc key (please ask)**
Floor part	**TOY type GA floor part**

INSTALLATION

1. Position the lock head on the bottom slat of the door, aligned with the floor part.
2. Fix the lock head to the door.
3. For a new installation, recess the floor part flush with the floor, directly below the lock.
4. Close the door and check that the lock enters the floor part and locks.

PACKAGE CONTENTS

- 1 original TOY lock head
- Keys
- Floor part (complete device only)

ISO 9001 2015

Comercial CBM 95, S.L. certifies that this product is manufactured in its facilities in Arenys de Munt (Barcelona) following the quality standards of its quality manual, in accordance with ISO 9001:2015, certified by TÜV Rheinland (no. 0.04.09198). If you order more than one unit, state whether you want them keyed alike or with different keys.

MADE IN EUROPE BY Blamar