TECHNICAL DATA SHEET · HINGES FOR SHOWER SCREENS

Synera C-C-90

Synera CC Rg 90 hinge · Glass-to-glass 90º

REFERENCE	SERIES	FAMILY	REVISION
3060	Synera Classic	CBM · Bathroom hinges	1 · Nov. 2026



DESCRIPTION

Glass-to-glass 90º hinge for shower screens.

Synera Classic range, available in AISI 304 or AISI 316 grade.

Solid steel
AISI 304 or AISI 316.

Double action
With hold-open: opens 90º outwards and 90º inwards.

Closes at 15º
Self-closing and +/-5 degree adjustment.

50 kg load
Maximum recommended weight per set.

AVAILABLE FINISHES



Polished · Matt · Black · Polished gold · Matt gold


PRICE LIST CODES

FINISH	AISI 304	AISI-316
Polished	3060B	3060IB
Matt	3060M	3060IM


Finishes without a code: please ask.

Synera C-C-90 · Technical data

DRAWING

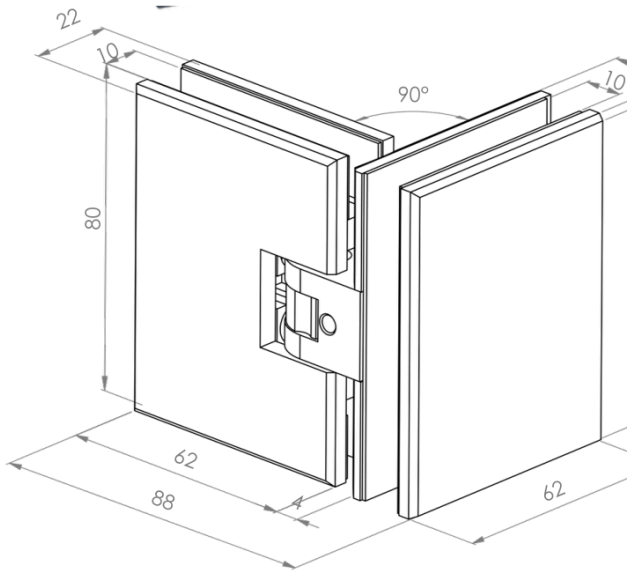

Drawing

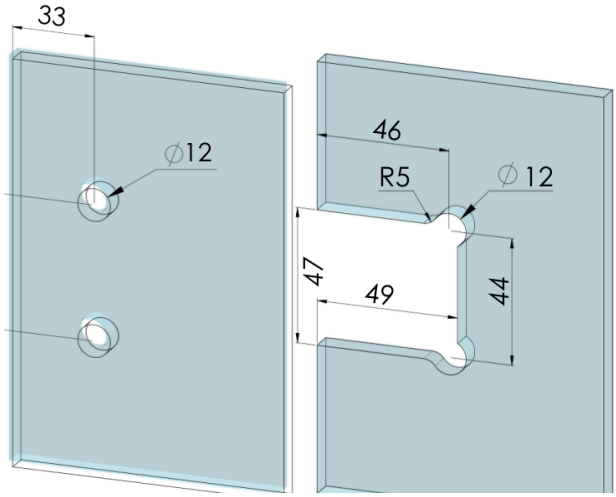

Notch in the glass

Dimensions in mm, according to the CBM bathroom catalogue.

SPECIFICATIONS

Application	**Shower screens, including steam showers and saunas**
Material	**Solid AISI 304 or AISI 316 stainless steel**
Glass	**8 and 10 mm (12 mm on request)**
Hole in the glass	**Ø12 mm**
Max. weight per set	**50 kg**
Max. width/height	**1000 mm - 2000 mm**
Finishes	**Polished, matt, matt black RAL 9005, polished gold and matt gold**

FEATURES

- Solid AISI 304 or AISI 316 stainless steel.
- Double-action hinge with hold-open: opens 90º outwards and 90º inwards.
- Self-closing at 15º.
- +/-5 degree adjustment.
- Maximum recommended weight per set 50 kg (using 3 hinges is not recommended).
- For 8 and 10 mm glass (12 mm on request for smaller doors).
- Max. width/height 1000 mm - 2000 mm.
- Suitable for all kinds of showers, including steam showers and saunas.
- Improved gaskets, pivot point and screws in matching finishes.

ISO 9001 2015

Comercial CBM 95, S.L. works according to its quality manual, in accordance with ISO 9001:2015, certified by TÜV Rheinland (no. 0.04.09198).

MADE IN EUROPE BY Blamar